



**848T
WHEEL
LOADER**

848T SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 3 / Stage III
Manufacturer	Cummins
Model	B7
Rated Power	133 kW (178 hp / 181 ps) @ 2,200 rpm
Peak Torque	946 N·m @ 1,500 rpm
Displacement	6.7 L
Number of Cylinder	6
Aspiration	Turbocharged & Air-to-air intercooled


TRANSMISSION	
Transmission Type	Countershaft, power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	39.3 km/h
Maximum Travel Speed, rev	26.6 km/h
Number of Speed, fwd	4
Number of Speed, rev	3

AXLES	
Differential Front Type	Limited slip differential
Differential Rear Type	Limited slip differential
Axle Oscillation	±12°

STEERING	
Steering Hydraulic System	Load sensing hydraulic steering
Steering Relief Pressure	22 MPa

BRAKES	
Service Brake Type	Wet discs brake
Service Brake Actuation	Full hydraulic
Parking Brake Type	Drum
Parking Brake Actuation	Electro-hydraulic release

HYDRAULIC SYSTEM	
Main Pump Type	Piston
Main Relief Pressure	28 MPa
Raise	5.2 s
Dump Time	1.0 s
Float Down Time	3.2 s
Hydraulic Cycle Time	9.4 s

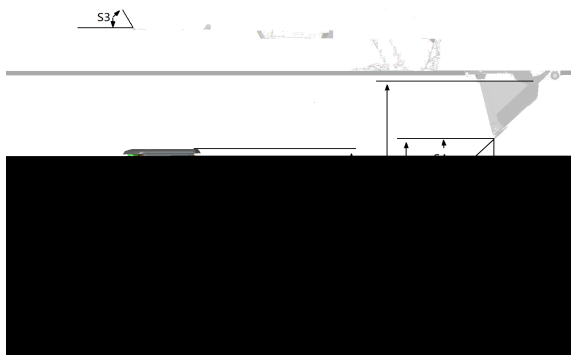

LOADER ARM PERFORMANCE WITH STANDARD BUCKET 2.7 m³	
Tipping Load - Straight (ISO 14397-1:2007)	11,550 kg
Tipping Load - Full Turn	

